




Sampler for safe operation on critical plant access points

Imagine your sampling valve starts leaking and 200 °C hot product is spraying out of the pressure vessel and you can't stop it.

Imagine, your operator does a faulty operation and hot product is splashing right, left and centre injuring personal.

By this unique sampler you may prevent such accidents!

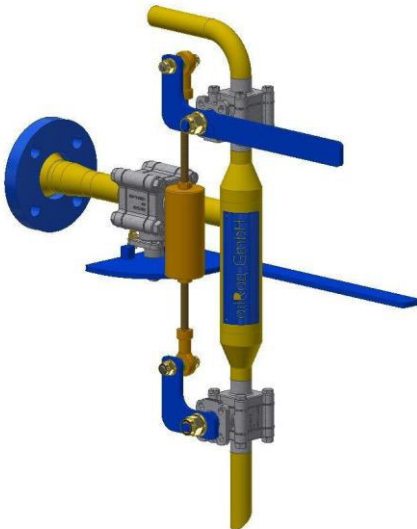

This sampler is designed for safe operation even for sample taking out of pressure vessels. Sample can be taken from vacuum or from pressurized vessels of up to 20 bar.

Two ball valves in line are mechanically interlocked. This insures that the unit always stays tight during sample taking. Hence any faulty operation is excluded.